



Enclosed solutions

► METAL ENCLOSED SWITCH-DISCONNECTORS

Main features

S5 switches in metal enclosure

3P & 3P+N versions

Available for switches from 40 A up to 3150 A

External padlockable handle that locks the door in ON I position

Door opening is blocked by the padlock when handle is in OFF 0 position

Designed for heavy duty applications and environments

Conforms to

- IEC 60947- 3
- IEC 61439-2



Amp	Poles		Enclosure dimensions (height x width x depth) mm
	3P	3P+N	
40	CIS25C00403PB	CIS25C00403NB	300x250x150
63	CIS25C00633PB	CIS25C00633NB	300x250x150
80	CIS25C00803PB	CIS25C00803NB	300x250x150
125	CIS25C01253PB	CIS25C01253NB	300x250x150
160	CIS25C01603PB	CIS25C01603NB	300x250x150
200	CIS25C02003PS	CIS25C02003NS	400x300x200
250	CIS25C02503PR	CIS25C02503NR	400x300x200
315	CIS25C03153PR	CIS25C03153NR	400x300x200
400	CIS25C04003PC	CIS25C04003NC	500x400x200
630	CIS25C06303PR	CIS25C06303NR	500x400x200
800	CIS25C08003PR	CIS25C08003NR	600x400x200
1000	CIS25C10003PC	CIS25C10003NC	1000x800x250
1250	CIS25C12503PS	CIS25C12503NS	1000x800x250
1600	CIS25C16003PS	CIS25C16003NS	1200x800x400
1800	CIS25C18003PS	CIS25C18003NS	1200x800x400
2000	CIS25C20003PS	CIS25C20003NS	1200x800x400
2500	CIS25C25003PS	CIS25C25003NS	1800x800x500
3150	CIS25C31503PS	CIS25C31503NS	1800x800x500

► METAL ENCLOSED CHANGEOVER SWITCHES

Main features

Manual changeover switches in metal enclosure

3P & 3P+N versions

Available from 63 A up to 3150 A:

- CTR2EC – CEC series, from 63 A up to 125 A
- CTR2FC – S5F series, from 125 A up to 200 A and from 1600 A up to 3150 A
- CTR2CC – CC series, from 250 A up to 1250 A

External padlockable handle that locks the door in ON I – ON II positions



Designed for heavy duty applications and environments

Conforms to

- IEC 60947- 3
- IEC 61439-2



Amp	Poles		Enclosure dimensions (height x width x depth) mm
	3P	3P+N	
63	CTR2EC00633PB	CTR2EC00633NB	300x300x150
80	CTR2EC00803PB	CTR2EC00803NB	300x300x150
100	CTR2EC01003PS	CTR2EC01003NS	300x300x150
125	CTR2EC01253PS	CTR2EC01253NS	300x300x150
125	CTR2FC01253PS	CTR2FC01253NS	400x300x200
160	CTR2FC01603PS	CTR2FC01603NS	400x300x200
200	CTR2FC02003PS	CTR2FC02003NS	400x300x200
250	CTR2CC02503PS	CTR2CC02503NS	500x400x250
315	CTR2CC03153PS	CTR2CC03153NS	500x400x250
400	CTR2CC04003PS	CTR2CC04003NS	500x400x250
500	CTR2CC05003PS	CTR2CC05003NS	700x500x250
630	CTR2CC06303PS	CTR2CC06303NS	700x500x250
800	CTR2CC08003PS	CTR2CC08003NS	700x500x250
1000	CTR2CC10003PS	CTR2CC10003NS	800x600x300
1000	CTR2CC10003PS	CTR2CC10003NS	1200x800x400
1250	CTR2CC12503PS	CTR2CC12503NS	1200x800x400
1600	CTR2FC16003PS	CTR2FC16003NS	1800x800x500
1800	CTR2FC18003PS	CTR2FC18003NS	1800x800x500
2000	CTR2FC20003PD	CTR2FC20003ND	1800x800x500
2500	CTR2FC25003PP	CTR2FC25003NP	2000x1000x900
3150	CTR2FC31503PP	CTR2FC31503NP	2000x1000x900

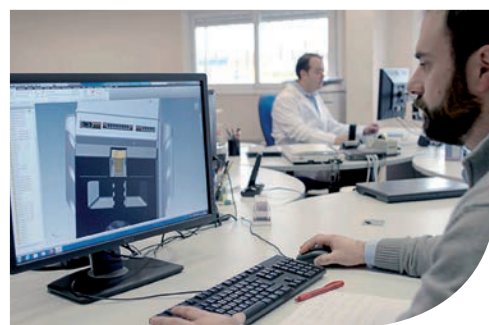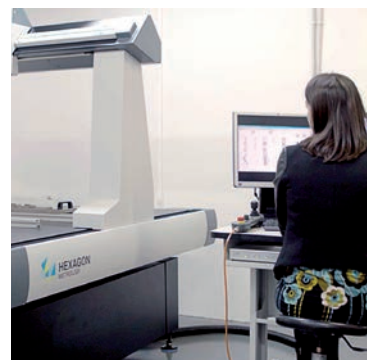

The switch specialist that anticipates its customers' needs through the research, design, manufacture and commercialization of low voltage power switching products and solutions for the industrial, energy distribution, photovoltaic and railway markets

As an **innovative and customer orientated firm**, Telergon is strongly committed to R&D as a tool to boost the future of the industry. Due to this attitude, the company offers a wide range of **standard products** but also the possibility to **customize** them according to special requirements.

Product range

- Cam switches
- Manual & motorized load break switches
- Fuse switches
- Manual & motorized changeover switches
- DC switch-disconnectors

Its **knowledge**, acquired through an experience of more than **65 years**, together with the involvement of its **highly qualified professionals**, has allowed Telergon to be present in more than **80 countries**, always providing the best service and working under the most strict quality standards.

Quality Telergon



General standards*



* Please, consult.

Other independent standards



Test in independent laboratories



Distributed by

Telergon, SAU
Ctra. Castellón – Pol. La Cartuja
50720 La Cartuja Baja
Zaragoza, Spain

Tel. +34 976 500 876
comercial@telergon.com
www.telergon.com