

Due to the continuous improvement & modifications of our products, the details included in this catalogue can be modified at any time without prior consent.



The switch specialist that anticipates its customers' needs through the research, design, manufacture and commercialization of low voltage power switching products and solutions for the industrial, energy distribution, photovoltaic and railway markets

As an **innovative and customer orientated firm**, Telergon is strongly committed to R&D as a tool to boost the future of the industry. Due to this attitude, the company offers a wide range of **standard products** but also the possibility to **customize** them according to special requirements.

Its **knowledge**, acquired through an experience of more than **65 years**, together with the involvement of its **highly qualified professionals**, has allowed Telergon to be present in more than **80 countries**, always providing the best service and working under the most strict quality standards.

Product range

- Cam switches
- Manual & motorized load break switches
- Fuse switches
- Manual & motorized changeover switches
- DC switch-disconnectors

Quality Telergon



General standards*



* Please, consult.


Other independent standards



Test in independent laboratories



Distributed by

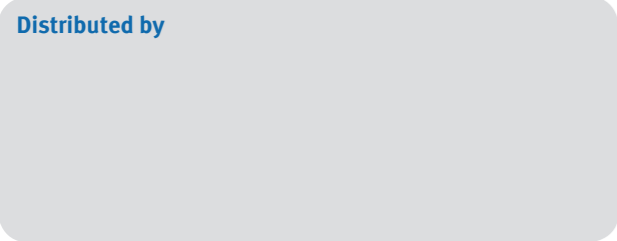

Telergon, SAU
Ctra. Castellón – Pol. La Cartuja
50720 La Cartuja Baja
Zaragoza, Spain

Tel. +34 976 500 876
comercial@telergon.com
www.telergon.com

telergon
gorlan



Enclosed solutions

www.telergon.com



gorlan

TDM-ENCLO-ING-11/2019

▶ METAL ENCLOSED SWITCH-DISCONNECTORS

Main features

S5 switches in metal enclosure

3P & 3P+N versions

Available for switches from 40 A up to 3150 A

External padlockable handle that locks the door in ON I position

Door opening is blocked by the padlock when handle is in OFF 0 position

Designed for heavy duty applications and environments

Conforms to

- IEC 60947- 3
- IEC 61439-2



| Amp | Poles | | Enclosure dimensions (height x width x depth) mm |
|------|---------------|---------------|--|
| | 3P | 3P+N | |
| 40 | CIS25C00403PB | CIS25C00403NB | 300x250x150 |
| 63 | CIS25C00633PB | CIS25C00633NB | 300x250x150 |
| 80 | CIS25C00803PB | CIS25C00803NB | 300x250x150 |
| 125 | CIS25C01253PB | CIS25C01253NB | 300x250x150 |
| 160 | CIS25C01603PB | CIS25C01603NB | 300x250x150 |
| 200 | CIS25C02003PR | CIS25C02003NR | 400x300x200 |
| 250 | CIS25C02503PR | CIS25C02503NR | 400x300x200 |
| 315 | CIS25C03153PR | CIS25C03153NR | 400x300x200 |
| 400 | CIS25C04003PR | CIS25C04003NR | 500x400x200 |
| 630 | CIS25C06303PR | CIS25C06303NR | 500x400x200 |
| 800 | CIS25C08003PR | CIS25C08003NR | 600x400x200 |
| 1000 | CIS25C10003PS | CIS25C10003NS | 1000x800x250 |
| 1250 | CIS25C12503PS | CIS25C12503NS | 1000x800x250 |
| 1600 | CIS25C16003PS | CIS25C16003NS | 1200x800x400 |
| 1800 | CIS25C18003PS | CIS25C18003NS | 1200x800x400 |
| 2000 | CIS25C20003PD | CIS25C20003ND | 1200x800x400 |
| 2500 | CIS25C25003PP | CIS25C25003NP | 1800x800x500 |
| 3150 | CIS25C31503PP | CIS25C31503NP | 1800x800x500 |

▶ METAL ENCLOSED CHANGEOVER SWITCHES

Main features

Manual changeover switches in metal enclosure

3P & 3P+N versions

Available from 63 A up to 3150 A:

- CTR2EC – CEC series, from 63 A up to 125 A
- CTR2FC – S5F series, from 125 A up to 200 A and from 1600 A up to 3150 A
- CTR2CC – CC series, from 250 A up to 1250 A

External padlockable handle that locks the door in ON I – ON II positions

Designed for heavy duty applications and environments

Conforms to

- IEC 60947- 3
- IEC 61439-2



| Amp | Poles | | Enclosure dimensions (height x width x depth) mm |
|------|------------------|------------------|--|
| | 3P | 3P+N | |
| 63 | CTR2EC00633PB | CTR2EC00633NB | 300x300x150 |
| 80 | CTR2EC00803PB | CTR2EC00803NB | 300x300x150 |
| 100 | CTR2EC01003PS | CTR2EC01003NS | 300x300x150 |
| 125 | CTR2EC01253PS | CTR2EC01253NS | 300x300x150 |
| 125 | CTR2FC01253PS | CTR2FC01253NS | 400x300x200 |
| 160 | CTR2FC01603PS | CTR2FC01603NS | 400x300x200 |
| 200 | CTR2FC02003PS | CTR2FC02003NS | 400x300x200 |
| 250 | CTR2CC02503PS | CTR2CC02503NS | 500x400x250 |
| 315 | CTR2CC03153PS | CTR2CC03153NS | 500x400x250 |
| 400 | CTR2CC04003PS | CTR2CC04003NS | 500x400x250 |
| 500 | CTR2CC05003PS | CTR2CC05003NS | 700x500x250 |
| 630 | CTR2CC06303PS | CTR2CC06303NS | 700x500x250 |
| 800 | CTR2CC08003PS | CTR2CC08003NS | 700x500x250 |
| 1000 | CTR2CC10003PSP95 | CTR2CC10003NSP95 | 800x600x300 |
| 1000 | CTR2CC10003PS | CTR2CC10003NS | 1200x800x400 |
| 1250 | CTR2CC12503PS | CTR2CC12503NS | 1200x800x400 |
| 1600 | CTR2FC16003PS | CTR2FC16003NS | 1800x800x500 |
| 1800 | CTR2FC18003PS | CTR2FC18003NS | 1800x800x500 |
| 2000 | CTR2FC20003PD | CTR2FC20003ND | 1800x800x500 |
| 2500 | CTR2FC25003PP | CTR2FC25003NP | 2000x1000x900 |
| 3150 | CTR2FC31503PP | CTR2FC31503NP | 2000x1000x900 |