




WENZHOU WALTON ELECTRICAL CO.,LTD

ADD : C607 Section, Binhai Industrial Area, Wenzhou Economic & Technological Development Zone, Zhejiang Province, China
Email : fiona@we-walton.com
Mob : 0086-15988770257
Website : www.walton-electrical.com



FACEBOOK

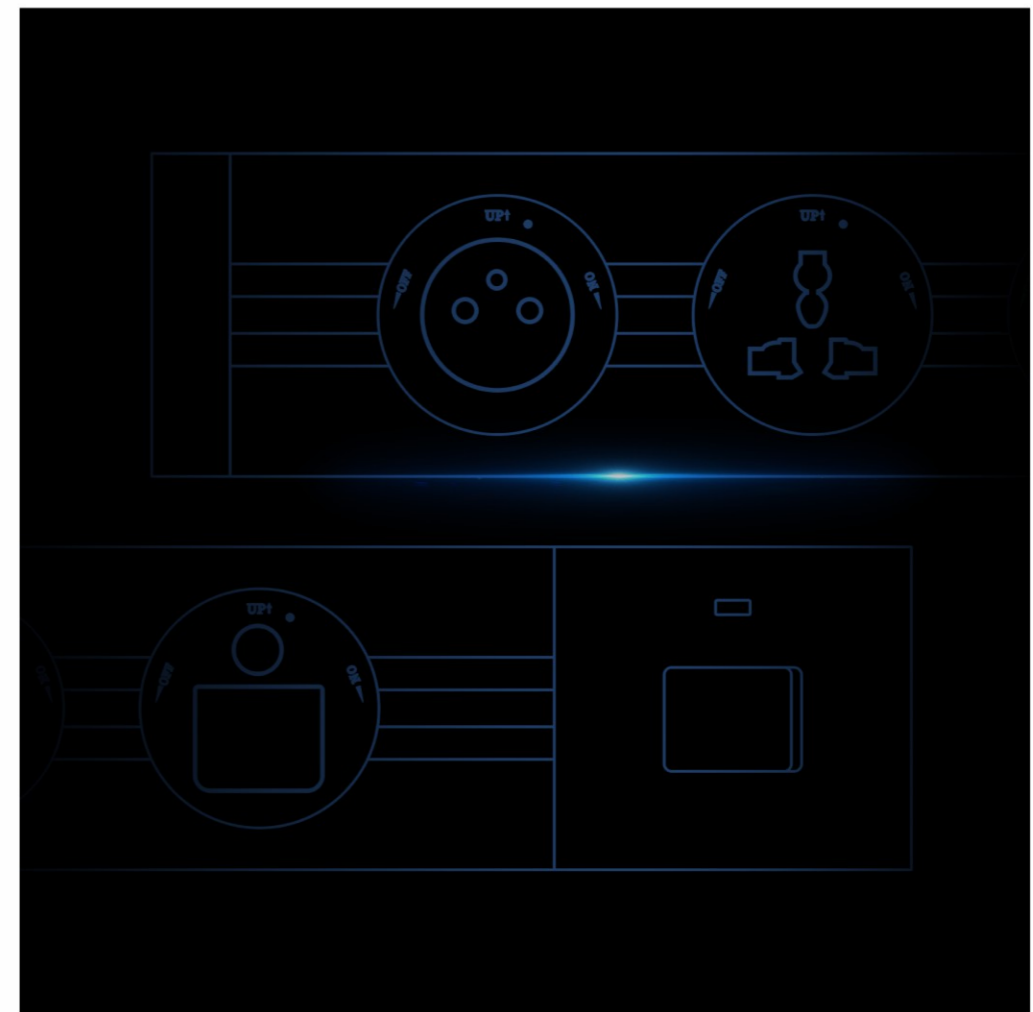


TRACK SOCKET

2021

WEDO
ONE WE WHOLE WORLD


Moving track
socket

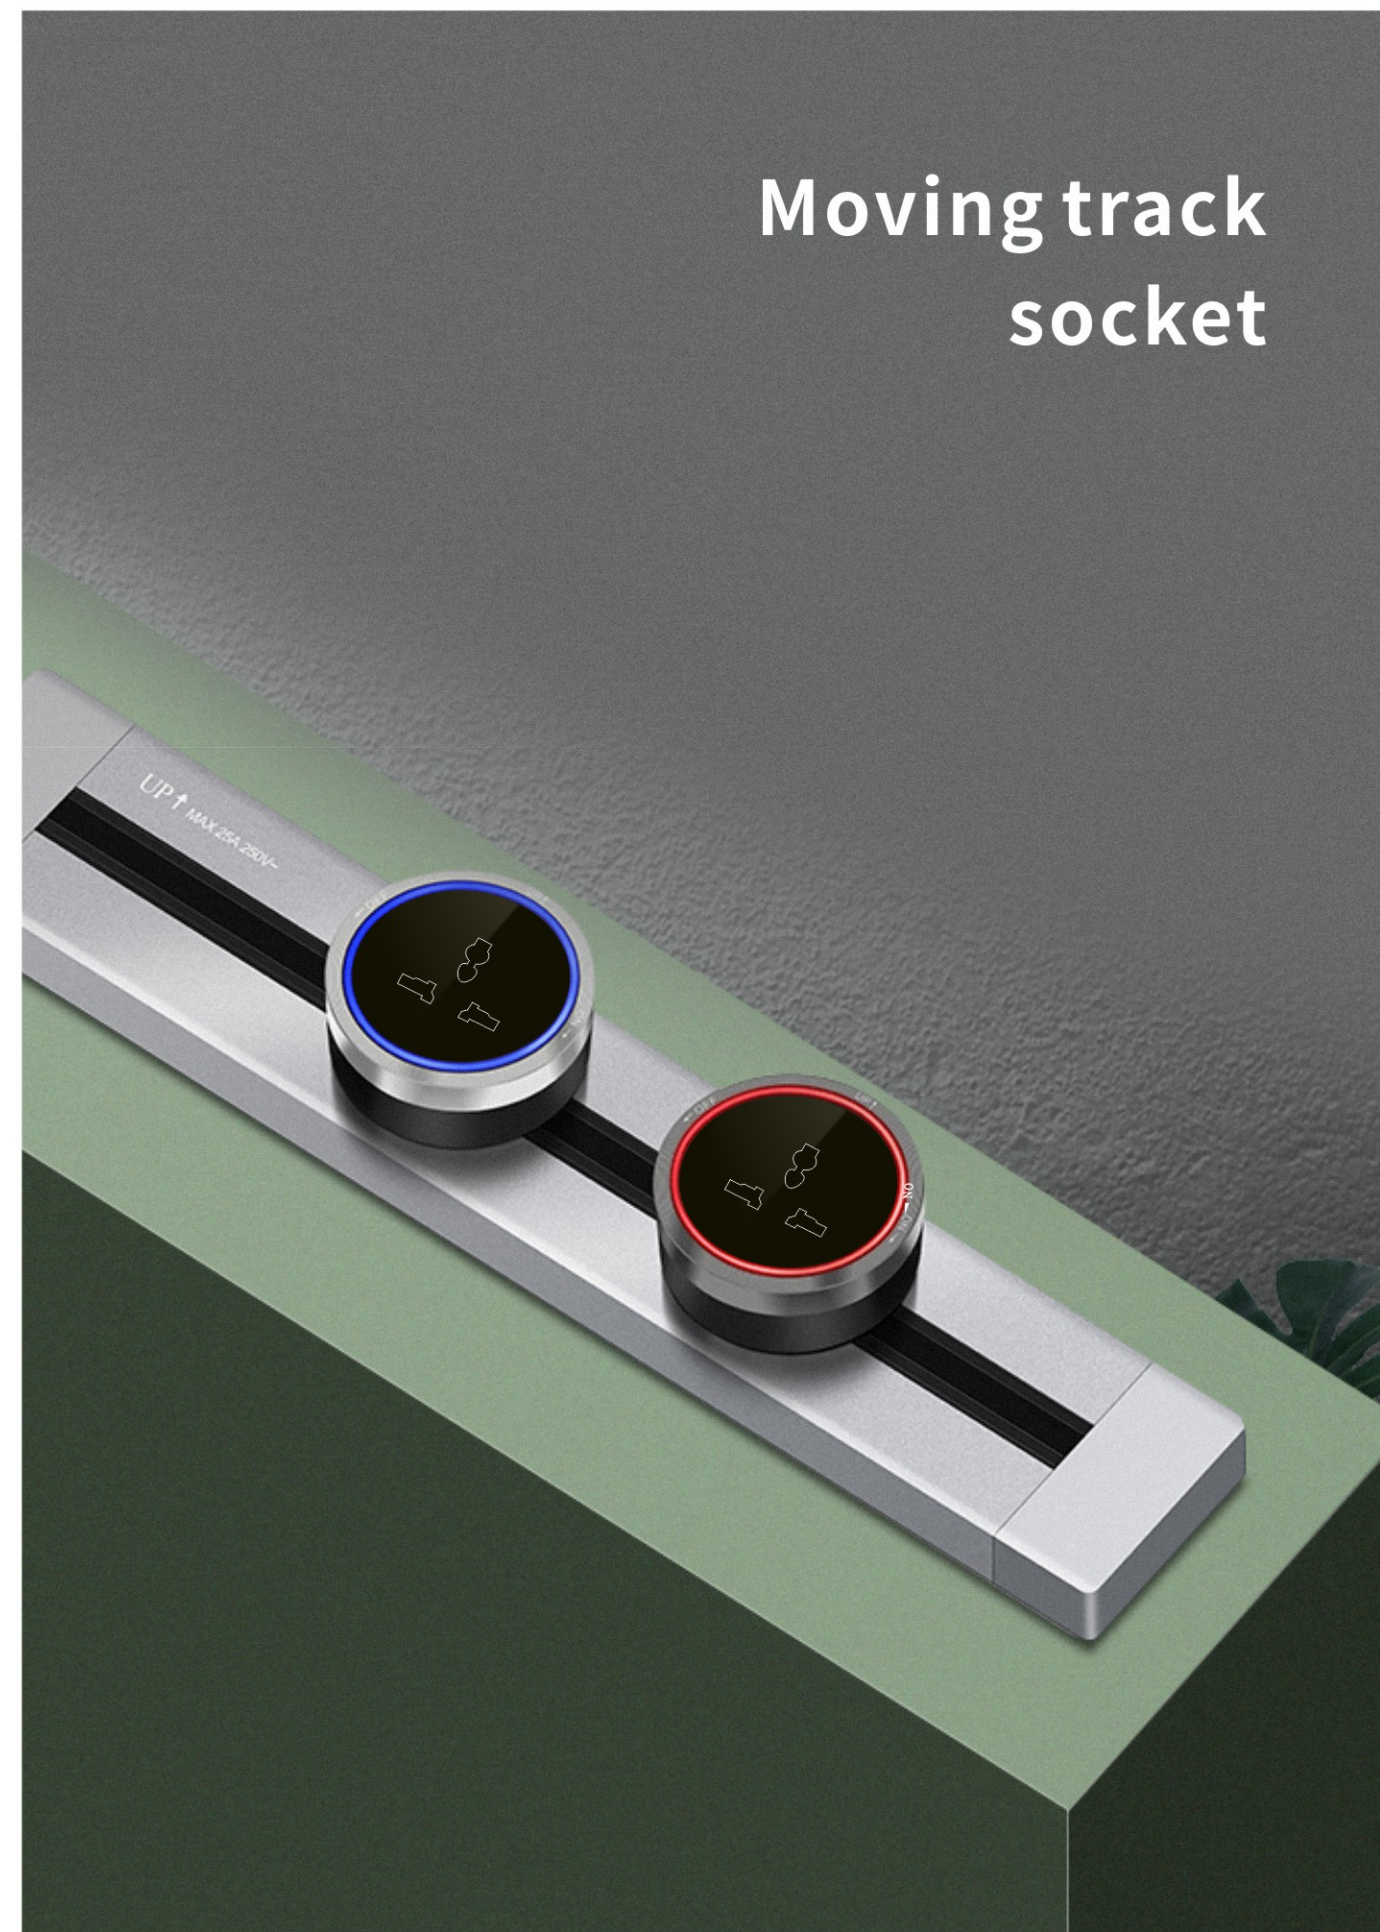



Aluminum alloy Oxidation proofing process

Aluminum alloy sturdy and durable, and easy surface cleaning, no fear of oil stains.

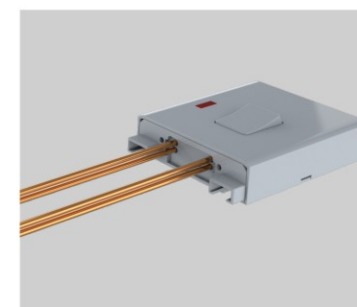


3.1mm copper conductor, so the track can carry 8000W.

3.1mm copper rod equivalent to 8 square power line track can carry at least 8000W, each set of adapters can carry 2500W, household high-power appliances can be used.




Double break design of power switch, Improve safe living

5mm diameter and 50 wires thickness, the silver alloy contact has good electrical conductivity, anti-arc oxidation and double-break function protection design, which guarantees the quality of life.

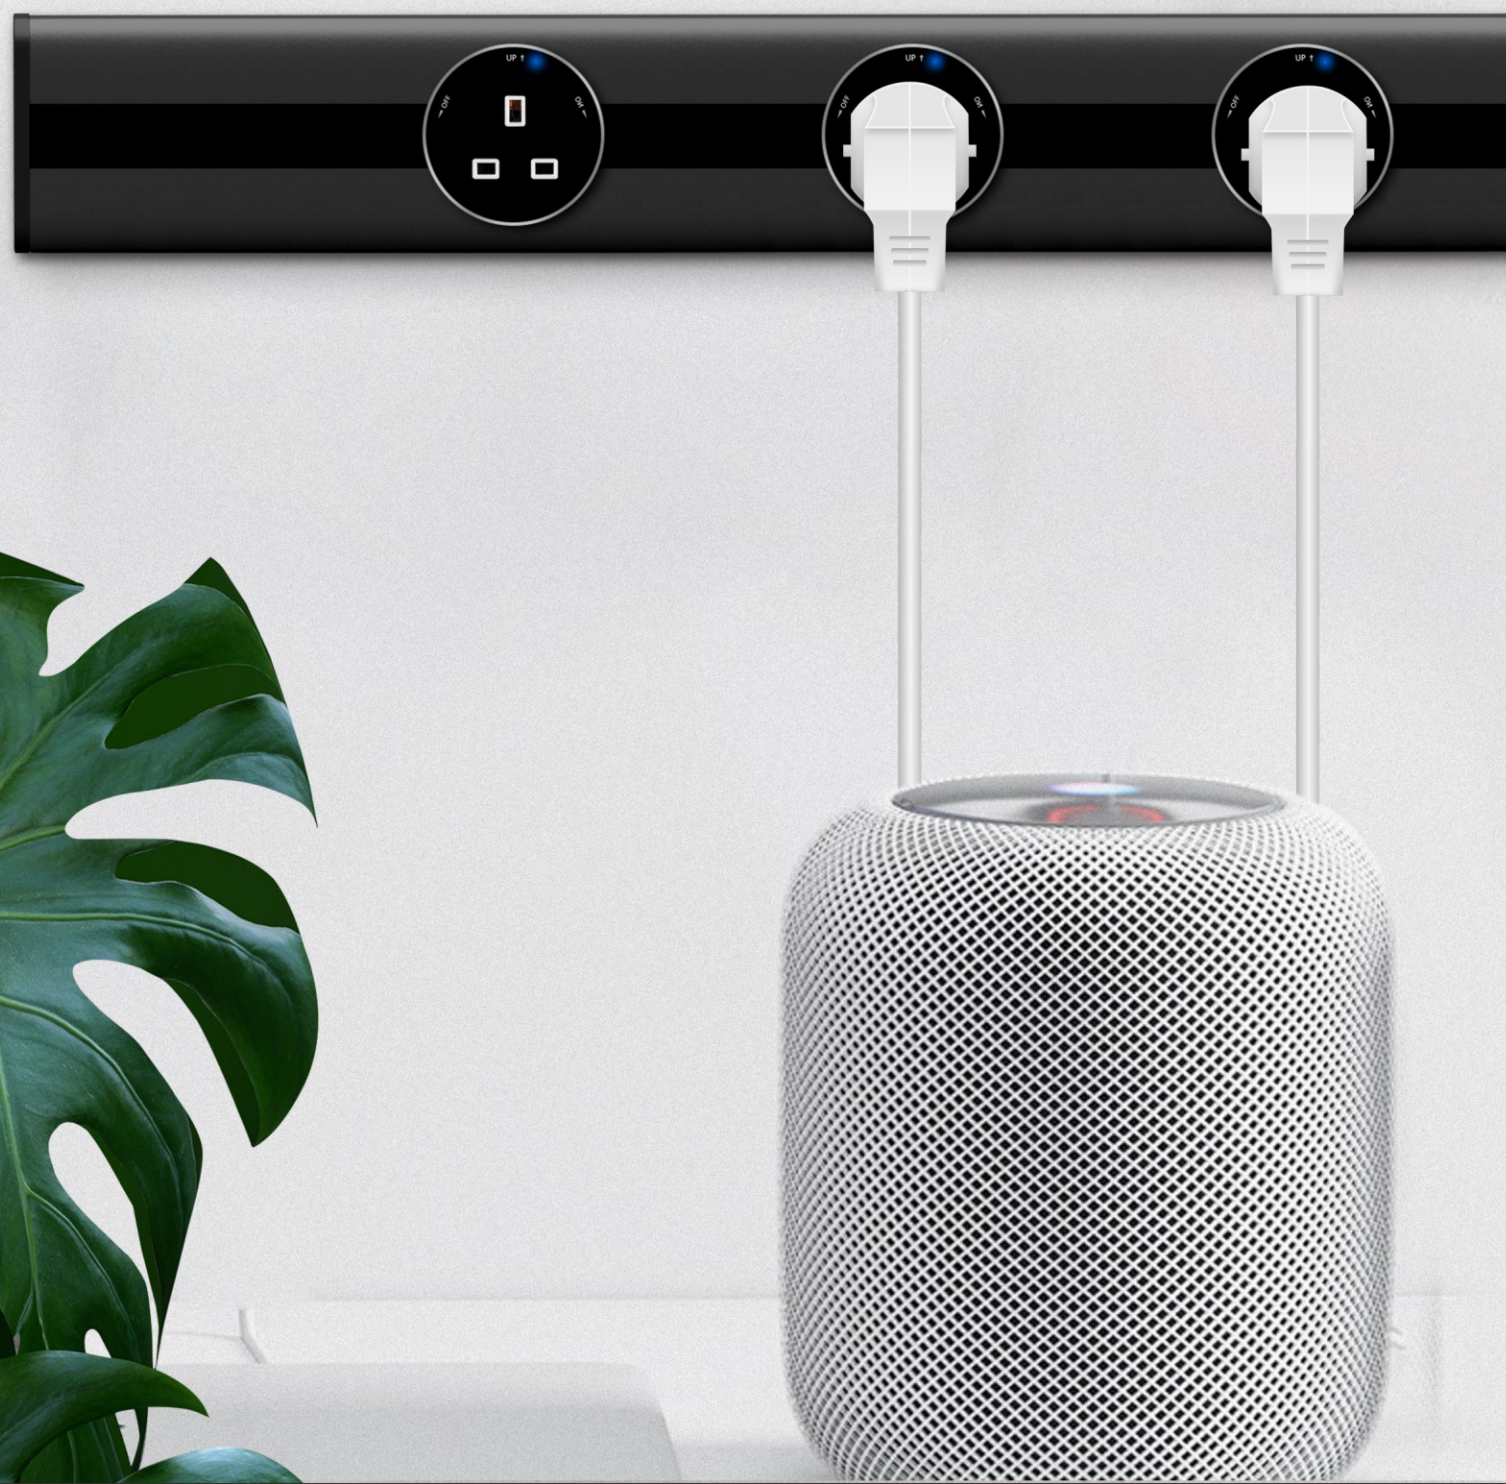

Easily modified, can cover the switch box that used on the wall

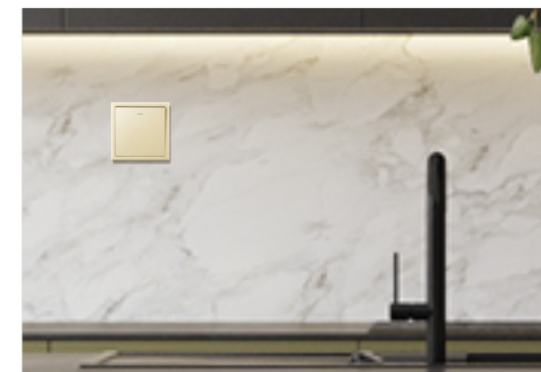

01

The common switch function is single and not practical



02

The surface track can cover 86/118 switch box, directly wire connection, seamless installation, more convenient and fast



03

Modular design, flexible and convenient, comprehensive functions, free add function socket, can use at any time

One track socket can meet the demand for simultaneous use of different home appliances

Various modules can be arbitrary choice, arbitrary combination, more practical and more aesthetic



5500W high -power ,plug in enough appliances.

Turn on more electricity.



Electric cooker
500-1200W



Electric oven
1500-2200W



Microwave oven
900-1500W



Electric kettle
500-1200W



Induction cooker
500-1200W




Coffee machine
900-1200W



Safety insulation


The conductor is at the top of the track, and only a small gap, separating the copper strips can have safety insulation

Small gap design, L and N is up, and E is down, hand-held metal directly inserted into the track will not get electric shock

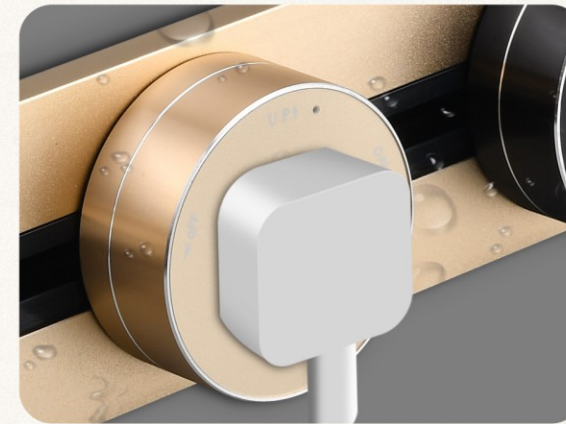

safe switch

Safe unplug and plug, effectively prevent accidental electric shock.

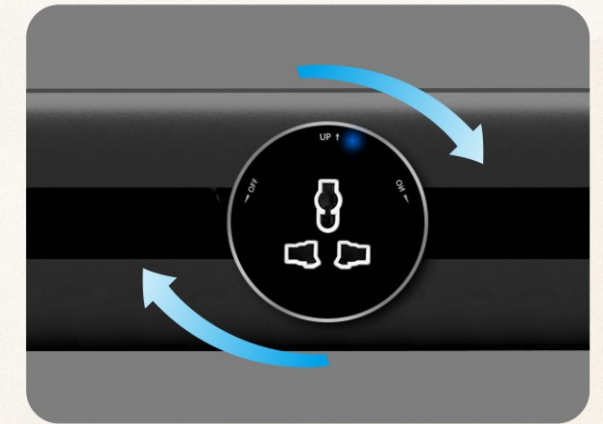


Rotate 90° clockwise.

when the current is turned counterclockwise the power is cut off.



the safety of track, we are serious.

Small gap design, earthing structure in advance, hand-held metal objects inserted directly into the inner track will not cause electric shock.

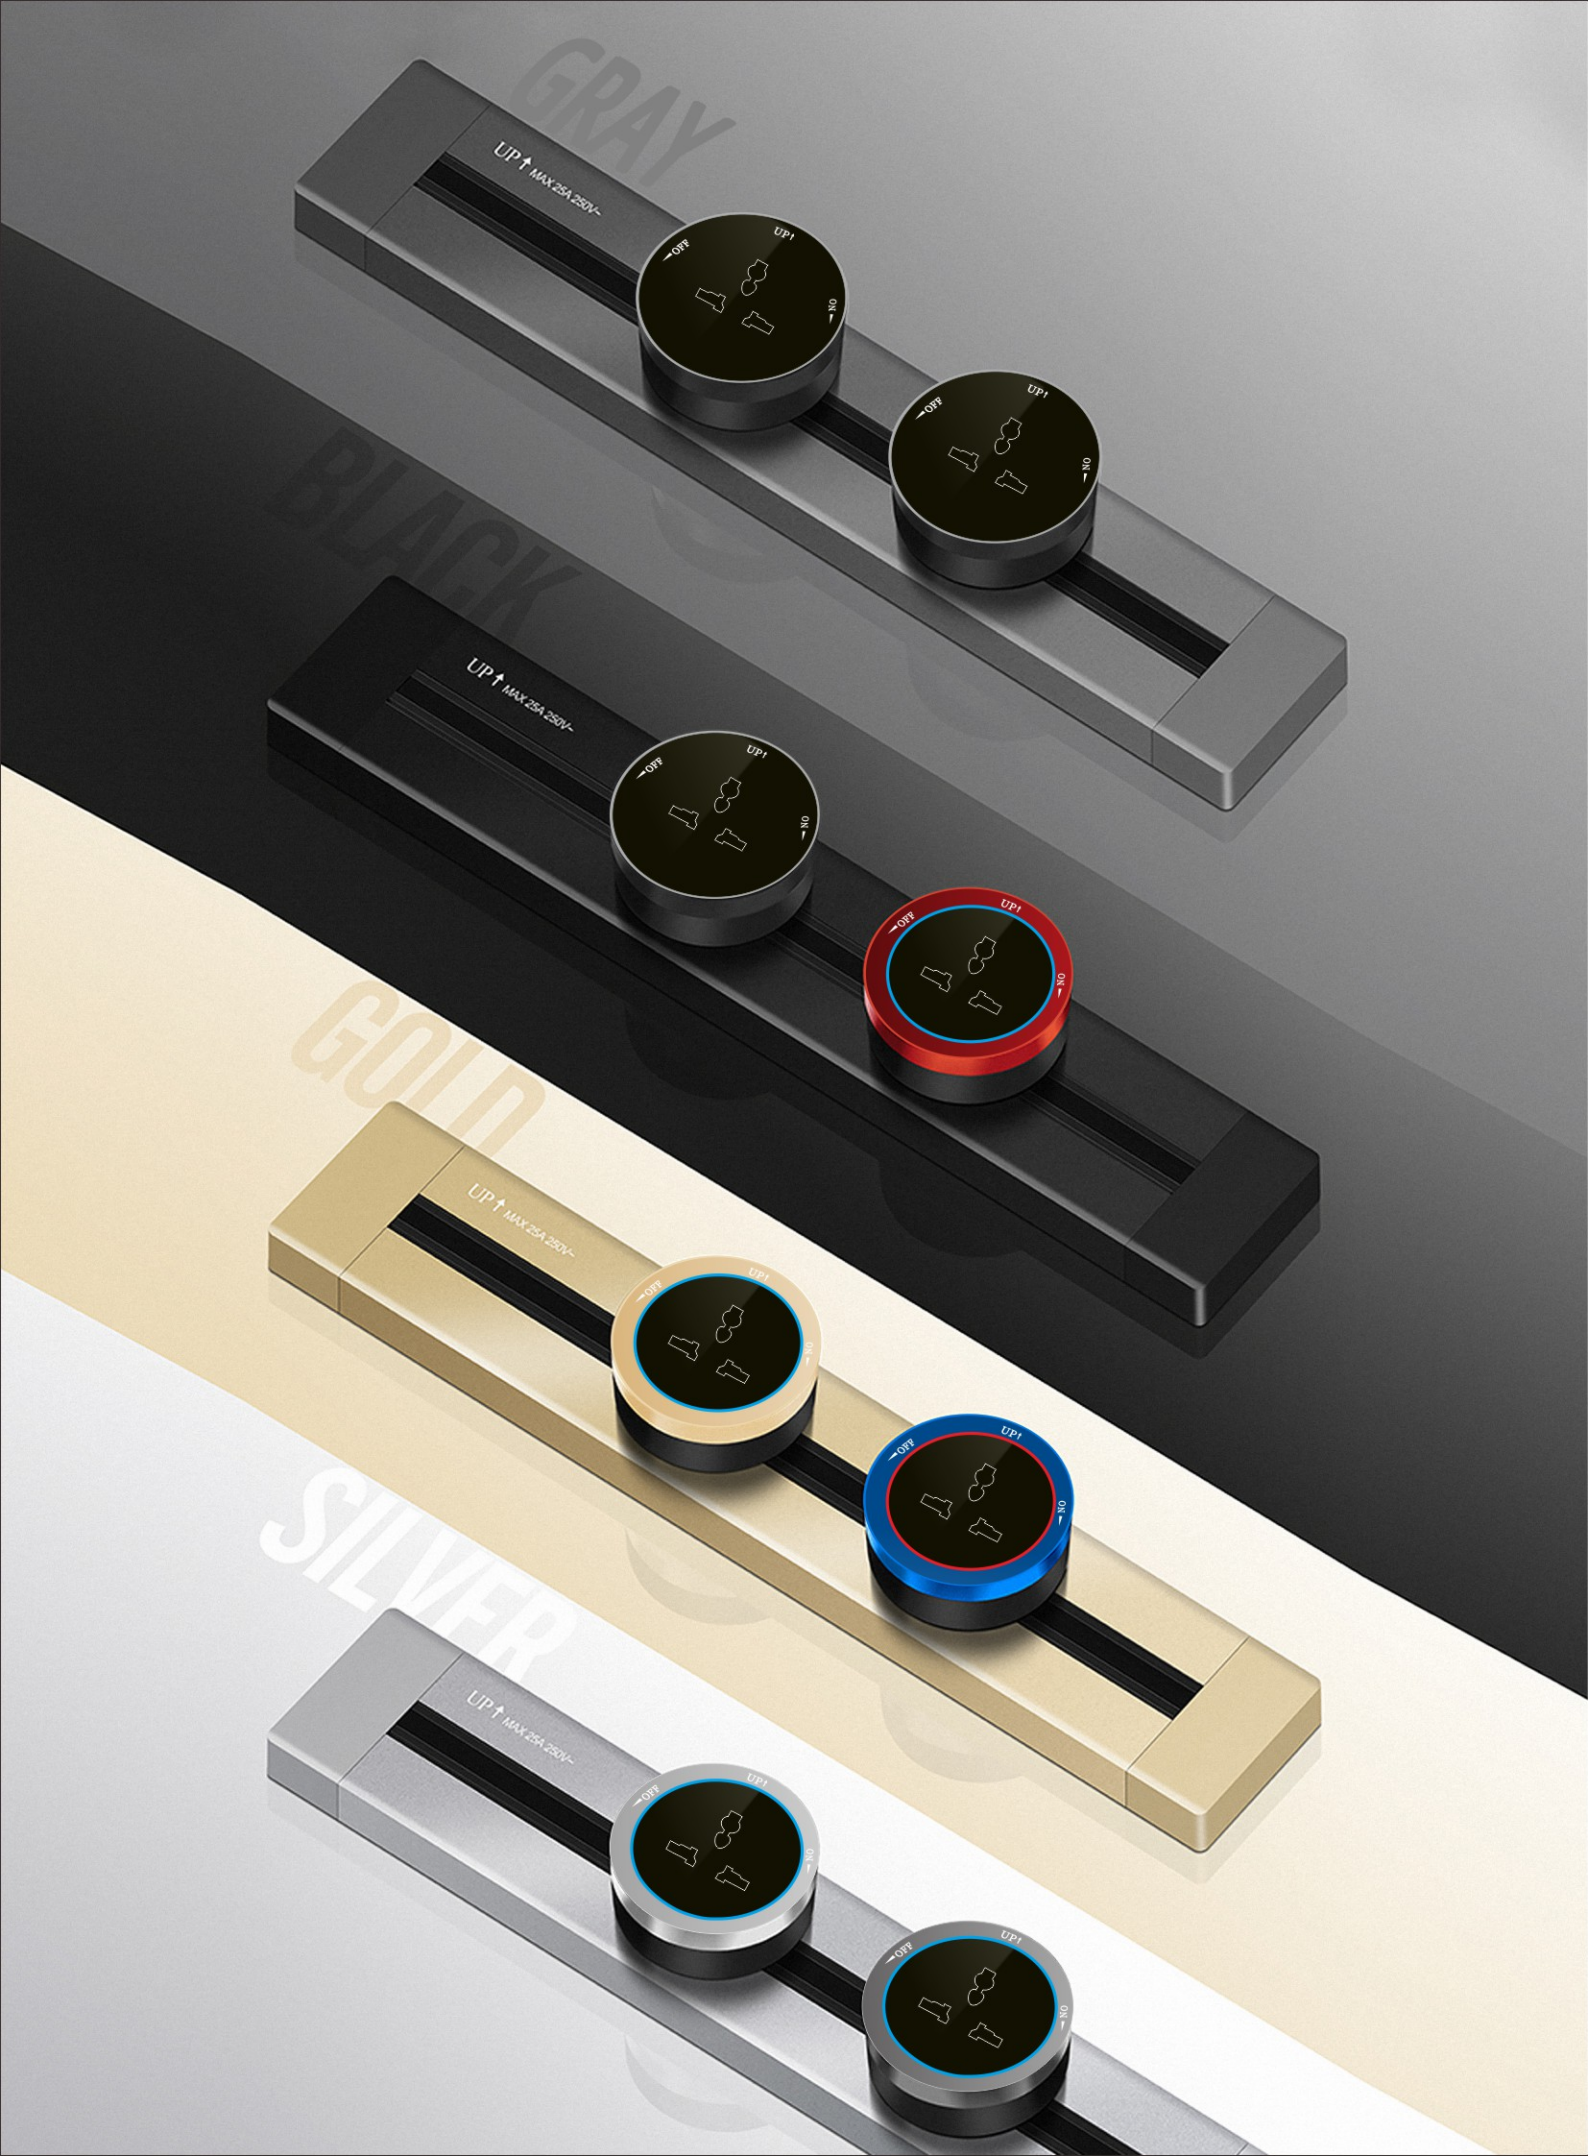

With independent switch type



Without switch type




- Space Silver
- Space Grey
- Champagne gold
- Mocha black



Aluminum body, two design with LED or without


Can satisfy more equipment at the same time
electricity, can decorate your beautiful home.



Gem blue




Space Silver



Champagne gold



Mocha black



Gem blue



Space Silver



Champagne gold



Mocha black



Gem blue



Space Silver



Champagne gold




Mocha black

Track length

Recessed type track

Specifications

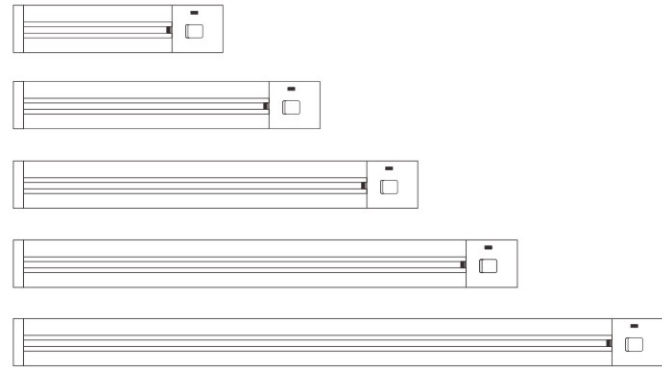

Can customized

wide*thickness*length slot size

8x2.16x60cm 7.2x59.3cm

8x2.16x80cm 7.2x79.3cm


8x2.16x100cm 7.2x99.3cm

8x2.16x120cm 7.2x119.3cm

8x2.16x150cm 7.2x149.3cm

Surface mounting type

Specifications

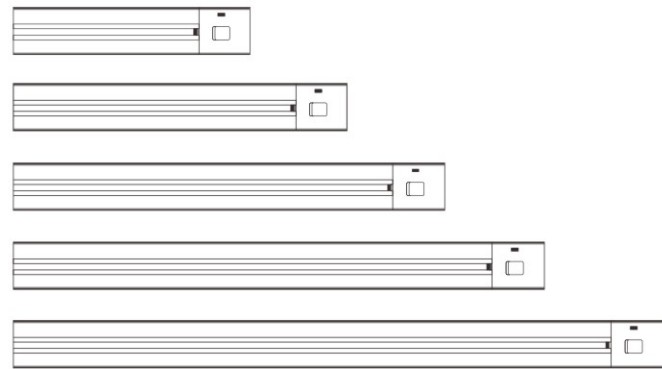

Can customized

wide*thickness*length


8.2x2.16x60cm

8.2x2.16x80cm

8.2x2.16x100cm

8.2x2.16x120cm

8.2x2.16x150cm

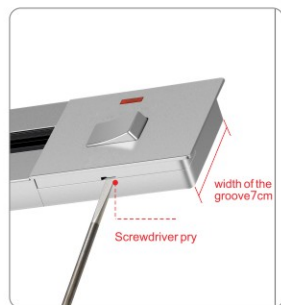

Round module



MF socket

13A socket

American 3 pin
MF socket

American 3 pin
flat socket

Italian socket

Brazil socket



Germany socket

France socket

Wireless charging

Double USB socket

LED indicator light

Human body
sensing footlights

Square module



MF socket

13A socket

American 3 pin
MF socket

American 3 pin
flat socket

Italian socket

Brazil socket



Germany socket

France socket

Wireless charging

Double USB socket

LED indicator light

Human body
sensing footlights


Surface mounting type VS Recessed type

The recessed track needs slotting, which is suitable for installation before decoration, and the surface mounting track no need slotting, can be installed before or after decoration



INSTALLATION INSTRUCTION

Recessed type track

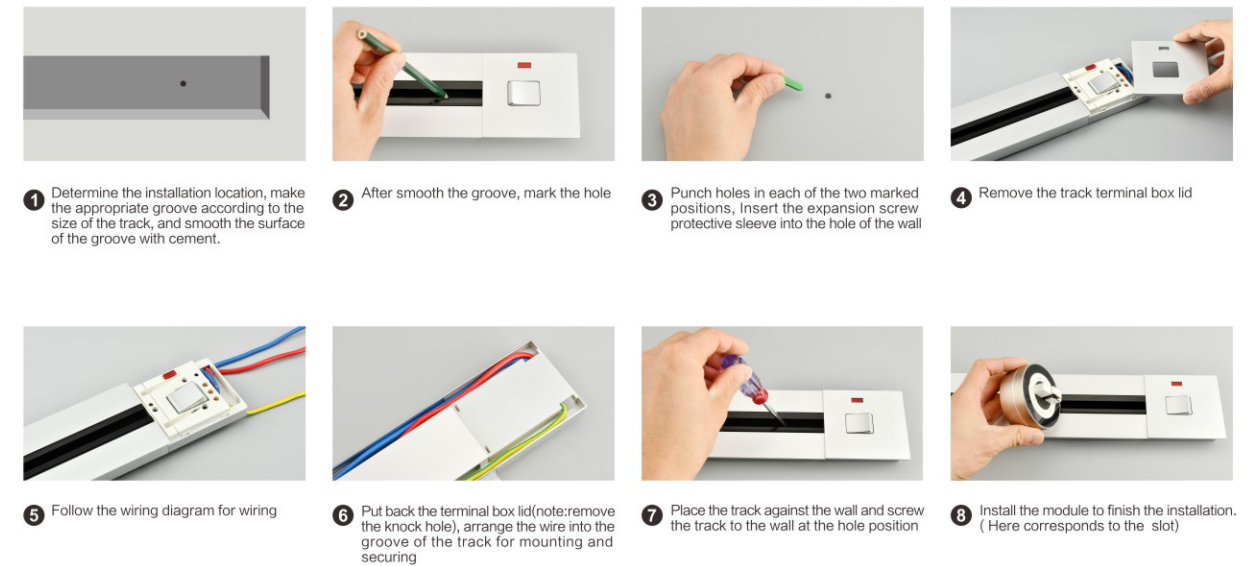

Surface mounting type

